




2 LITER FOAM EXTINGUISHER CLASS A B F – MODEL FS2-P



Made in Italy - EU



VUURKLASSE		
		
8	70	25

FS2-P Foam extinguisher under pressure in aluminium cylinder with manometer, Class ABF

Body: Single piece, deep drawn aluminium alloy body; externally painted with polyester resin
Valve is ergonomically designed to guarantee an easy use with one hand
All external plastic parts are either in plastic material or protected against corrosion
Provided with an inspectional pressure gauge
Propellant gas: Nitrogen with a low percentage of Helium
Extinguishing: Water with retardant + AFFF
Temperature ranges: 0°C + 60°C
Bracket: Plastic, specially designed for vehicle use
Use: <ul style="list-style-type: none"> - Class A: Ordinary combustibles - Class B: Flammable liquid and gas - Class F: Cooking oils and fats (kitchen fires)
Conform EN3, Rijkstypekeur 3325, PED Directive 2014/68/EU with CE marking, MPA Dresden
Packing: Carton box, 4 pieces per outer carton
EAN-code: 8 713686 004089

SPECIFICATIONS

MODEL:	FS2-P	
FIRE CLASS:	8A- 70B - 25F	
CHARGE:	2 lt + 0 - 5 %	
PROPELANT:	Nitrogen or helium/nitrogen	
EXTINGUISHING	Water + additive	
DISCHARGES:	Discharge Duration:	18 s
	Foam Jet:	4 m
CYLINDER:	Construction material:	Aluminium alloy
	Construction methode:	Deep drawing
	External painting:	Polyester resin, minimum thickness 50 µm
	Corrosion resistant:	480 h minimum according to ISO 9227:2017
PRESSURE:	Pressure to 20 °C:	11 bar
	Pressure to 60 °C:	13 bar
	Pressure to 0 °C:	9 bar
DIMENSION:	Total Height:	378 mm
	Ext. Diameter of the cylinder:	108 mm
WEIGHT:	Empty / Charged:	0,68 kg / 2,68 kg
PACKING:	Standard packing:	4 pieces / carton
	Dimension Carton:	240 x 245 x 405 mm
	Volume:	0,023 m ³
	Weight per carton:	11,4
	Pallet:	60 cartons (240 st)
	Pallet size: B x L x H:	800 x 1200 x 1764 mm
Pallet volume:	1.68 m ³	
	Weight per pallet (net/gross):	684 kg / 704 kg

Body

Seamless, deep drawn aluminum alloy body, ensures maximum sealing and, thanks to its light weight, perfect handling. Externally painted with polyester resin.

Valve

The handy compact valve is ergonomically designed to guarantee an easy use with one hand; the acetal resin body and the construction material of the cap ensure perfect protection against corrosion. The safety button (push 1) and the operating button (push 2) are clearly visible. The shock-proof pressure gauge provides an accurate indication of the pressure status of the extinguisher.


Extinguishing agent

Water with fire retardant and AFFF. All parts in contact with the extinguishing agent are protected against corrosion.

Propellant

The propellant gas is nitrogen. A small percentage of helium is added, to allow electronic leak detection.

This data and characteristics may be subject to change.

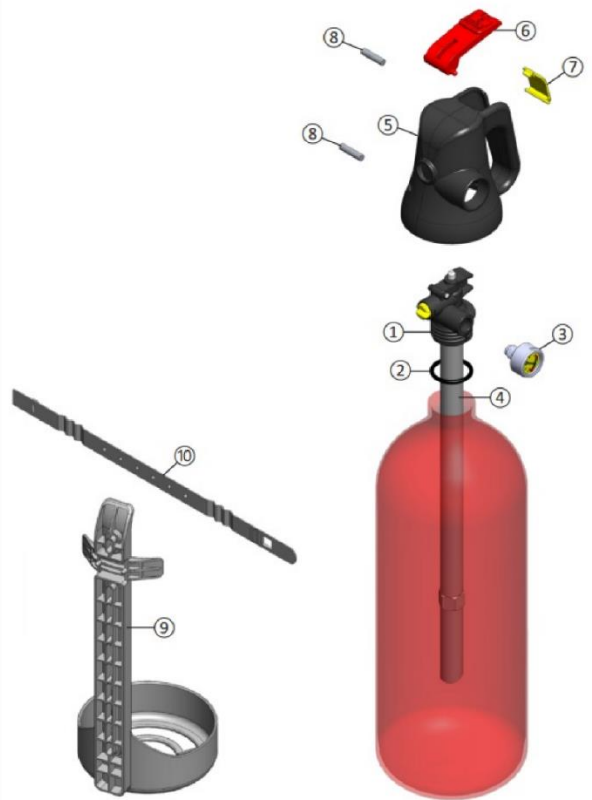

Nr.	Description
1	Valve with o-ring and dip tube, without pressure gauge
2	O-ring for the valve
3	Pressure gauge
4	Dip tube
5	Premium cap
6	Lever for Premium cap
7	Safety pin for Premium cap
8	Inox-A2 2.9x19 tapping screw
9	Bracket
10	Bracket strip