





2 LITER FOAM EXTINGUISHER CLASS A B F – MODEL FS2-P



Made in Italy - EU



VUURKLASSE		
		
8	70	25

FS2-P Foam extinguisher under pressure in aluminium cylinder with manometer, Class ABF

Body: Single piece, deep drawn aluminium alloy body; externally painted with polyester resin
Valve is ergonomically designed to guarantee an easy use with one hand
All external plastic parts are either in plastic material or protected against corrosion
Provided with an inspectional pressure gauge
Propellant gas: Nitrogen with a low percentage of Helium
Extinguishing: Water with retardant + AFFF
Bracket: Plastic, specially designed for vehicle and marine use
Use: <ul style="list-style-type: none"> - Class A: Ordinary combustibles - Class B: Flammable liquid and gas - Class F: Cooking oils and fats (kitchen fires)
Conform EN3, Rijkstijpekeur 3325, PED Directive 2014/68/EU with CE marking, MPA Dresden
Packing: Carton box, 4 pieces per outer carton.
EAN-code: 3 588322 096590

SPECIFICATIONS


MODEL:	FS2-P	
FIRE CLASS:	8A- 70B - 25F	
CHARGE:	2 lt + 0 - 5 %	
PROPELANT:	Nitrogen or helium/nitrogen	
EXTINGUISHING	Water + additive	
DISCHARGES:	Discharge Duration:	18 s
	Foam Jet:	4 m
CYLINDER:	Construction material:	Aluminium alloy
	Construction methode:	Deep drawing
	External painting:	Polyester resin, minimum thickness 75 µm
	Corrosion resistant:	480 h minimum according to ISO 9227:1990
PRESSURE:	Pressure to 20 °C:	11 bar
	Pressure to 60 °C:	13 bar
	Pressure to 0 °C:	9 bar
DIMENSION:	Total Height:	378 mm
	Ext. Diameter of the cylinder:	108 mm
WEIGHT:	Empty / Charged:	0,55 kg / 2,55 kg
PACKING:	Standard packing:	4 pieces / carton
	Dimension Carton:	240 x 240 x 400 mm
	Volume:	0,023 m³
	Weight per carton:	11,4
	Pallet:	60 cartons (240 st)
	Pallet size: B x L x H:	800 x 1200 x 1750 mm
Pallet volume:	1.68 m³	
Weight per pallet (net/gross):	684 kg / 704 kg	



The bracket is made of polypropylene and polyethylene. It can be fixed by screws on any surface, thanks to the different fastening points on the back of the bracket.

The safety strip fastens the fire extinguisher to the support, making it perfectly stable, also in case of violent impact.

This data and characteristics may be subject to change.

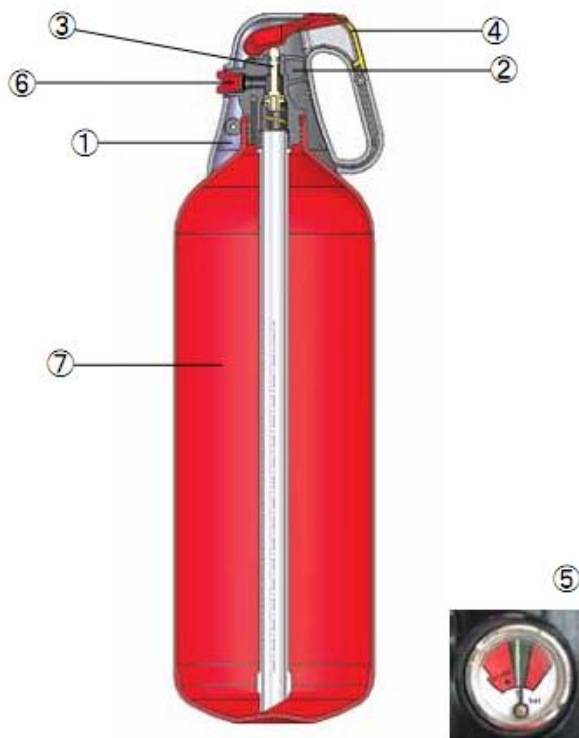

- ① The handy compact valve is ergonomically designed to guarantee an easy use with one hand. The construction material of the cap ensures a perfect protection against corrosion. The safety button – PUSH 1 – and the operating button – PUSH 2 – are clearly visible.
- ② The Valve is made of acetylic resin ensuring perfect corrosion protection.
- ③ The spindle is made of acetylic resin for perfect sealing.
- ④ The yellow safety button is easy to check thanks to a visible seal on the top. It is marked: PUSH 1.
- ⑤ The shock-proof pressure gauge provides an accurate indication of pressure status of the extinguisher.
- ⑥ The valve is equipped with nozzle: thanks to its special design, it permits a fine jet to carry out the dielectric test at 35Kv.
- ⑦ The single piece, deep drawn aluminium alloy body ensures maximum sealing and, thanks to its light weight, perfect handling.