


**3V INTERCONNECTABLE CARBON MONOXIDE DETECTOR (CO-detector) R200C-N1**

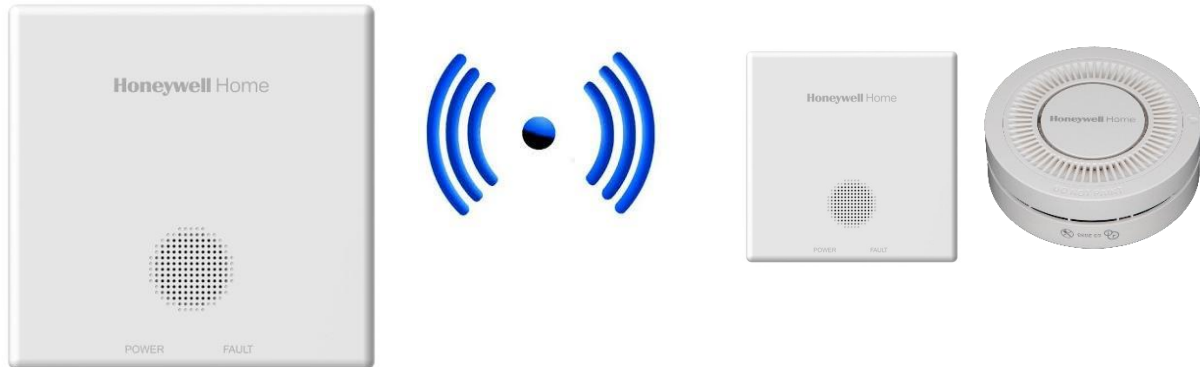

**R200C-N1  
INTERCONNECTABLE CARBON MONOXIDE DETECTOR 10 YEARS INCL. 3V LITHIUM BATTERY**

<b>Wirelessly connectable up to 12 pieces with the R200 N-series smoke, CO, heat, and combination detectors</b>
<b>RF frequency 868 MHz, RF Range: 100 m free field</b>
<b>Electrochemical detection</b>
<b>Power: sealed long life 3V lithium battery, not interchangeable</b>
<b>Maintenance-free operation, no battery replacement necessary</b>
<b>Operation Ambient Condition</b>
<b>Temperature: -10 - + 40° C</b>
<b>Humidity: 25-95% relative humidity (non-condensing)</b>
<b>Storage/Transport Ambient Condition</b>
<b>Temperature: -15 - + 45° C</b>
<b>Humidity: 25-95% relative humidity (non-condensing)</b>
<b>Degree of protection IP44 &gt; Suitable for bathroom conditions</b>
<b>The entire device cover is its TEST / SILENCE button</b>
<b>Hush alarm for 10 minutes: press the test button for 3 seconds</b>
<b>Hush error message for 9 hours: press the test button for 3 seconds</b>
<b>Audible: &gt;85 dB @ 3 meters distance</b>
<b>Visual red 'ALARM' text for the deaf and hearing-impaired</b>
<b>48-hour alarm memory</b>
<b>End of life signal</b>
<b>Automatic dimming of the green 'Power' light in low ambient light</b>
<b>Tamper-proof (optional)</b>
<b>Certification :</b>
<b>EN 60335-1:2012 +A11 +A13 +A1 +A14 +A2 +A15:2021, EN 50270:2015, EN 300220-1 (V3.1.1), EN 300220-2 (V3.1.1) EN IEC 630000:2018, EN 50291, Kitemark, B-Mark</b>
<b>Suitable for use in domestic premises (including static caravan holiday homes), (motor) caravans and boats</b>
<b>Easy installation, supplied with screws/plugs</b>
<b>Dimensions: 95 x 95 x 25 mm Weight: 120 gram Color: off-white</b>
<b>Packaging: 120 x 35 x 160 mm cardboard gift box with Euroloch, 40 pieces per outer box</b>
<b>User manual in packaging: EN, DE, NL, FR, ES, IT, PT and SE</b>
<b>Warranty and product life: 10 years</b>
<b>EAN-code: 5 059088 000230</b>